

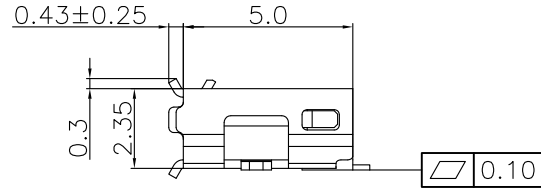
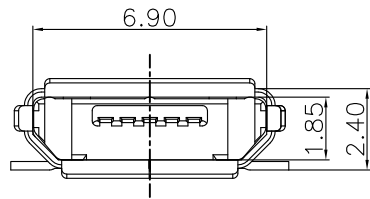


正式图 参考图 CUSTOMER DRAWING
The requirements of environmental protection
ROHS2 Halogen free

Mark	ECN NO.	DESCRIPTION	DESIGN	Date:
—	—	NEW VERSION	David Zhou	2014.03.18

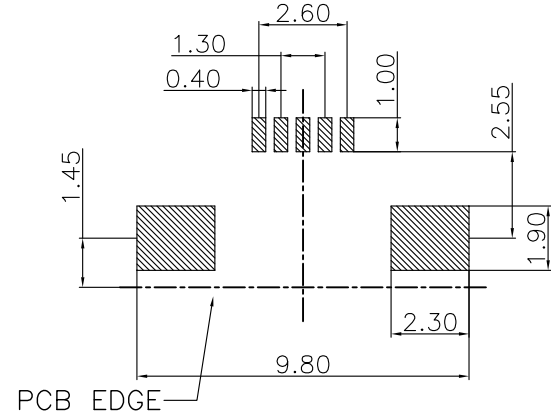

- NOTES:
- 1.Rating:DC30V 1A
 - 2.Contact Resistance:≤50Milliohm;
 - 3.Insulation Resistance:≥1000Megohm;
 - 4.Withstand Voltage:AC500V for one minute;
 - 5.Insertion force:35N Max,Extraction force:7N min
 - 6.Life test:5000 Cycles;
 - 7.Operating Temperature:-55°C~+105°C 85%RH Max;
 - 8.Storage Temperature:-55°C~+105°C 85%RH Max.

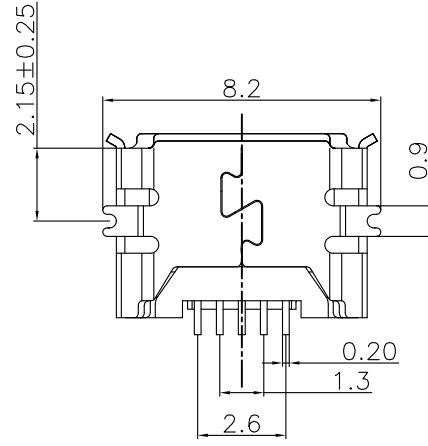

RECOMMENDED PCB LAYOUT
TOP VIEW
TOLERANCE:±0.05mm
PCB THICKNESS: 0.80±0.05mm

NO.	CODE	MATERIAL	COLOR	REMARK
1	C0	LCP UL94V-0	BLACK	RoHS2&H.F Fit

TABLE A : Plactical Material

P/N: UBXXXXX-XXXX-XXXXXXX

- Model P/N
- Plactical Material (Choose From Table A)
- Housing Color
 - 01:Black
- Packing
 - B:Tray; R:Tape reel;
- Remark
 - 0:Normal;
- Shell Material
 - C:Brass C2680;
 - S:SUS
- Plating Code
 - H:CONTACT AREA:GOLD,FALSH,SOLDER AREA:Bright TIN80U"
 - J:CONTACT AREA:3U"GOLD,SOLDER AREA:Bright TIN80U"
 - K:CONTACT AREA:15U"GOLD,SOLDER AREA:Bright TIN80U"
 - L:CONTACT AREA:30U"GOLD,SOLDER AREA:Bright TIN80U"
- Typ
 - MC:MICRO-B.
- Product salt mist
 - A:Normal(8 Hours);
 - B:24Hours;

NO.	DESCRIPTION	QTY	PARTS MATERIAL	PLATING OR COLOR	REMARK
3	SHIELD	1	Choose from P/N	Nickel Plated	X
2	TERMINAL	5	Copper Alloy	Selective Gold Plating.(Gold See Part No)	X
1	HOUSING	1	Choose from P/N	Choose from P/N item color	X

Tolerance	MODEL NAME:MICRO USB90度SMT B TYPE	DRAWING: David Zhou
X.X ±0.30	MODEL No: UB1025W-XXXX-XXXXXXX	CHECKED: David Zhou
X.XX ±0.20	SCALE:1:1	APPROVED: Jacky Lee
X.XXX ±0.10		REVISION A0
Angle ±3.0°	UNIT:mm	FILE: CD/LINGYANG
	菱揚精密有限公司 Ling Yang Precision Co.,Ltd	DWG NO.UB1025W-A001